



Graver Technologies

Filtration | Separation | Purification

MBA™ Melt Blown Filter Series

Absolute Rated Melt Blown Filters

The MBA filter series is 100% polypropylene and exhibits 99.9% retention at its rated pore size. The graded density microfiber matrix is optimized to provide a large void area, resulting in superior dirt holding capacity, higher flow rates and longer service life compared to other absolute rated melt blown filters.

Filter Features-Benefits

- Low pressure drop reduces energy costs
- High dirt holding capacity minimizes change-outs and down time
- Availability in all common configurations allows use of existing filter housings
- High strength polypropylene core provides increased temperature and differential pressure limitations.
- Cost effective absolute filtration at 99.9% efficiency (by ASTM F-795)
- 100% polypropylene offers cleanliness and broad chemical compatibility
- All materials are FDA listed for food and beverage contact

Typical Applications

- Ultrapure water
- Petrochemicals
- Beverage processing
- Magnetic media
- Potable water
- Metal working
- Plant utilities
- Photographic
- Hydraulic and lubricating oils

Filter Specifications

Media:	Polypropylene
End caps:	Polypropylene
Gaskets/O-Rings:	Silicone, Viton, EPDM, Buna-N and Teflon encapsulated Viton (O-Rings only)
Micron ratings:	1, 3, 5, 7, 10, 15, 20, 30, 40, 50, 75µm

Dimensions

Typical nominal lengths: 9.75" (24.8 cm), 10" (25.4 cm), 19.5" (49.5 cm), 20" (50.8 cm), 29.25" (74.3 cm), 30" (76.2 cm), 39.5" (100.3 cm), 40" (101.6 cm). Other lengths available

Outside diameter: 2.4" (6.10 cm)



Inside diameter: 1.1" (2.79 cm)

Maximum differential pressure: 60 psid @ 80 °F (4.1 bar @ 27°C)
30 psid @ 160 °F (2.1 bar @ 71°C)
15 psid @ 190 °F (1.0 bar @ 88°C)

Recommended change-out pressure: 35 psid (2.4 bar)



MBA FLOW RATE VS PRESSURE DIFFERENTIAL

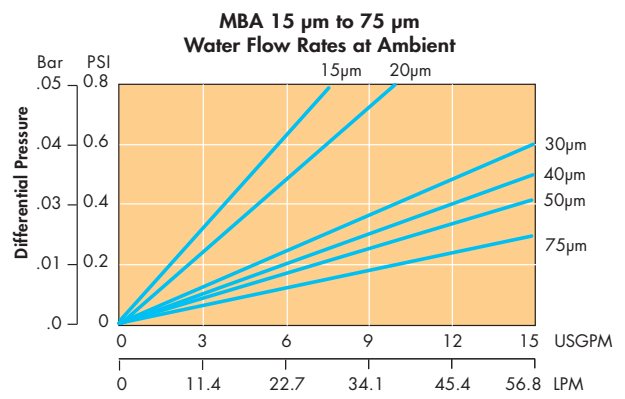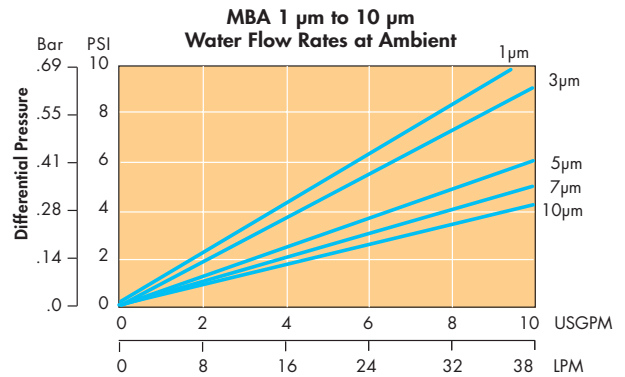

MBA Nomenclature Information

MBA Nomenclature Information				
MBA Filter Type MBA Series Filters	40	-19.5 Nominal Length (inches) -9.75 -10 -19.5 -20 -29.25 -30 -39 -40	P8	V Gasket or O-Ring S Silicone B Buna-N E EPDM V Viton T Teflon encap. Viton (O-Rings only) N None
Retention Rating (microns) 1 3 5 7 10 15 20 30 40 50 75		End Configuration P Double Open End (hard endcaps) P2 226/Flat Single Open End P3 222/Flat Single Open End P6 Self-Seal Spring on One End P7 226/Fin Single Open End P8 222/Fin Single Open End PX Extended Core N None (Cut ends)		

Example: MBA 40-19.5 P8V

For more information

Graver Technologies Customer Service: **1-888-353-0303**

Technical Support: **1-800-510-0932**

E-mail us at **info@gravertech.com**

Graver Technologies Europe (UK): **+44-1424-777791**

DISTRIBUTED BY:

All information and recommendations appearing in this bulletin concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Graver Technologies as to the effects of such use or the results to be obtained. Graver Technologies assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations. MBA is a trademark of Graver Technologies.



Graver Technologies

200 Lake Drive
Glasgow,
DE 19702 U.S.A.

302- 731-1700
800- 249-1990
Fax 302-369-0938

e-mail: info@gravertech.com
web site: www.gravertech.com

